MIBRASA CHARCOAL OVEN HMB AC C 75, 110, 160

Oven with full cupboard and extraction hood

TECHNICAL INFORMATION	HMB MINI	HMB 75	HMB 110	HMB 160
Diners*	35	75	110	160
Fire up time* (min)	20	25	30	35
Cooking temperature (ºF)	482-662	482-662	482-662	482-662
Cooking temperature (ºC)	250-350	250-350	250-350	250-350
Charcoal consumption* (lb/day)	16	29	40	45
Production* (lb/h)	55	154	220	265
Performance* (h)	8	9	10	10
Useful dimensions of grill (mm)	500 x 350	500 x 600	720 x 600	720 x 800
Equivalent power* (hp)	2,7	4,7	6,7	8
Exhaust rate (ft^3/s)	24,52	27,47	31,39	34,33

** Approximate data*

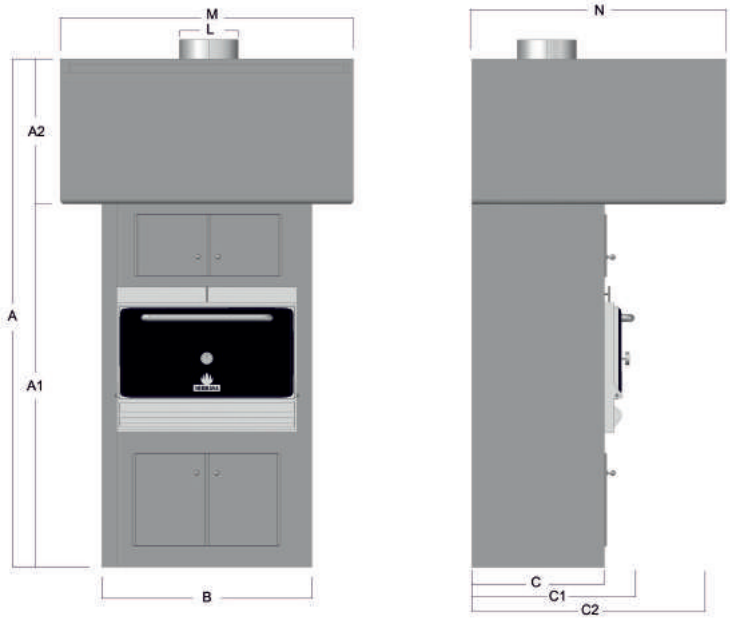

INCLUDED ACCESSORIES

- Grill
- Oven tongs
- Charcoal ember poker
- Ash shovel
- Grill brush
- Firebreak

OPTIONAL ACCESSORIES

- Extra grill
- Cookware
- Steel wheels with brakes

Model	A	A1	A2	B	C	C1	C2	L	M	N
HMB AC C75	2470	1870	600	850	650	830	1090	300	1300	1300
HMB AC C110	2470	1870	600	1070	650	830	1180	300	1500	1300
HMB AC C160	2470	1870	600	1070	850	1030	1370	300	1500	1500

OVEN´S DESCRIPTION

The air inlet is controlled by opening or closing the ash collector.

1. Firebreak
2. Pull regulator
(▬ Closed / ▌Open)
3. Door handle
4. Grills
5. Thermometer
6. Indoor grids
7. Door
8. Grease collector
9. Ash collector